

RhinoAg: **Class A** Implements

0-59 HP Tractors



Equipment designed specifically for **your tractor's horsepower**. Every RhinoAg® implement you can pull is here for easy browsing, with no distractions from products that won't fit your tractor. This curated list is designed to make it simple for you to find the best RhinoAg implement for your needs.



Built Rhino tough.

RhinoAg: **Class A** Implements

▶ **0-59** HP Tractors



www.rhinoag.com

1020 S. Sangamon Ave.

Gibson City, IL 60936

217-784-4261

Twister 10 Series[®]

Single-Spindle Rotary Cutter | **TW14** | **TW15** | **TW16**

Dependable performance at a competitive price.

RhinoAg's Twister Series cutters offer dependable performance at a competitive price. With a 1" material cutting capacity and the option of 48", 60", and 72" cutting widths, the Twister 10 Series is perfect for cutting around the farm, ranch, or homestead.

Twisters feature a 60HP gearbox, a CAT 3 driveline, a 12-gauge steel deck, and an Infinity Steel blade carrier. You can get Twisters in Genuine Rhino Orange or your choice of five custom colors in a powder-coated paint for great durability.

Features & Benefits

- CAT 3 Driveline
- Powder-coated paint for maximum durability and a great look

Who Should Buy:

Farms, Ranches, Homesteads



Twister 10 Series®

Single-Spindle Rotary Cutter | **TW14** | **TW15** | **TW16**

Standard Equipment & Specifications

	TW14	TW15	TW16
Cutting Width	48"	60"	72"
Overall Width	52 1/2"	64"	76 1/4"
Overall Length	87"	99"	111"
Cutting Height (Min)	1 1/2"	1 1/2"	1 1/2"
Hitch	CAT 1 - Std.	CAT 1 - Std.	CAT 1 - Std.
Blade Carrier	Infinity - Steel	Infinity - Steel	Infinity - Steel
Blades	1/2" x 3"	1/2" x 3"	1/2" x 3"
PTO HP Required (Min)	20	20	25
Gearbox Rating*	60 HP	60 HP	60 HP
Blade Tip Speed (FPM)	15,608	16,117	14,963
Cutting Capacity	1"	1"	1"
Driveline Size	CAT 3	CAT 3	CAT 3
Driveline Protection	Shear Bolt or Slip Clutch	Shear Bolt or Slip Clutch	Shear Bolt or Slip Clutch
Deck Thickness	12 Ga	12 Ga	12 Ga
Side Skirt	10 Ga	10 Ga	10 Ga
Tire and Wheel	3.75" x 15" Solid Rubber Tire	3.75" x 15" Solid Rubber Tire	3.75" x 15" Solid Rubber Tire
Safety Deflector	Front Belt/Rear Steel Band	Front Belt/Rear Steel Band	Front Belt/Rear Steel Band
Weight (Approx)	460 lbs	530 lbs	630 lbs

* Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

Twister 20 Series®

Single-Spindle Rotary Cutter | **TW25** | **TW26** | **TW27** | **TW27DTW**

Have the confidence to mow the most challenging terrain.

The Twister 20 Series offers the same Twister quality with a bigger bite. With cutting widths up to 84" and up to CAT 3 compatibility, the Twister 20 is practically a universal tool at an incredibly affordable price. Whether you're mowing down a road shoulder or clearing brush off the back forty, the Twister 20 is the cutter for the job!

No job is too large for the Twister Series single-spindle rotary cutter. CAT 1, CAT 2, and CAT 3 compatibility ensures it will play well with whatever tractor you're driving, while a heavy-duty tailwheel and 2" cutting capacity promise nothing will be left standing in its wake!

The Twister 20 Series boasts a high-capacity cutting chamber under a baffled deck with tapered side-skirts to help prevent gouging so you can cut what you want, when you want with no complaint from your rotary cutter.

Features & Benefits

- Steel infinity blade carrier
- Heavy-duty tailwheel
- Available in 5', 6' and 7' cutting widths

Who Should Buy:

Farms, Ranches,
Homesteads



Twister 20 Series®

Single-Spindle Rotary Cutter | **TW25** | **TW26** | **TW27** | **TW27DTW**

Standard Equipment & Specifications

	TW25	TW26	TW27	TW27DTW
Cutting Width	60"	72"	84"	84"
Overall Width	64 1/4"	76 1/4"	88 1/4"	88 1/4"
Overall Length	108"	118"	135"	135"
Cutting Height (Min)	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Hitch	CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™*	CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™*	CAT 2/CAT 3 Std., CAT 2/CAT 3 Q.H.	CAT 2/CAT 3 Std., CAT 2/CAT 3 Q.H.
Blade Carrier	Infinity - Steel	Infinity - Steel	Infinity - Steel	Infinity - Steel
Blades	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
PTO HP Required (Min)	25	35	45	45
Gearbox Rating**	65 HP	65 HP	130 HP	130 HP
Blade tip Speed (FPM)	14,335	14,963	14,369	14,369
Cutting Capacity	2"	2"	2"	2"
Driveline Size	CAT 3	CAT 3	CAT 4	CAT 4
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Deck Thickness	12 Ga	12 Ga	12 Ga	12 Ga
Side Skirt	7 Ga	7 Ga	7 Ga	7 Ga
Tire and Wheel	4" x 8" Laminated	4" x 8" Laminated	4" x 8" Laminated	(2) 4" x 8" Laminated
Safety Deflector	Deflectors or Chains	Deflectors or Chains	Deflectors or Chains	Deflectors or Chains
Weight (Approx) —with Rubber Deflectors	720 lbs	800 lbs	1105 lbs	1255 lbs
Weight (Approx) —with Chains	760 lbs	865 lbs	1180 lbs	1330 lbs

* iMatch™ is a trademark of Deere & Company

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261



Twister 30 Series[®]

Single-Spindle Rotary Cutter | **TW35** | **TW36**

Show brush who's boss—without the buildup. The TW35 and TW36 are the latest additions to the Twister Series of single-spindle rotary cutters. They're the first in the series to have a smooth, totally domed deck, helping reduce grass and debris buildup as you work. With their 1/2" x 4" updraft blades and impressive 3" cutting capacity, these 5' and 6' monsters are eager to show brush who's boss—without slowing you down in the process.

Features & Benefits

- Infinity cast blade carrier
- 3" cut capacity
- CAT 1 and CAT 2 standard and quick hitch compatible
- iMatch[™]* compatible
- Available in 60" and 72" cutting widths
- Laminated tires
- CAT 4 driveline with slip clutch protection

Who Should Buy:

Farms, Ranches,
Homesteads



*iMatch[™] is a trademark of Deere and Company.

Twister 30 Series®

Single-Spindle Rotary Cutter | **TW35** | **TW36**

Standard Equipment & Specifications

	TW35	TW36
Cutting Width	60"	72"
Overall Width	66 1/2"	78 1/2"
Overall Length	105"	121"
Cutting Height (Min)	1 1/2"	1 1/2"
Hitch	CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™*	CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™*
Blade Carrier	Infinity - Cast	Infinity - Cast
Blades	1/2" x 4" Updraft	1/2" x 4" Updraft
PTO HP Required (Min)	35	45
Gearbox Rating**	130 HP	130 HP
Blade tip Speed (FPM)	14,497	14,854
Cutting Capacity	3"	3"
Driveline Size	CAT 4	CAT 4
Driveline Protection	Slip Clutch	Slip Clutch
Deck Thickness	10 Ga	10 Ga
Side Skirt	1/4"	1/4"
Tire and Wheel	Laminated	Laminated
Safety Deflector	Deflectors or Chains	Deflectors or Chains
Weight (Approx) -with Rubber Deflectors	920 lbs	1075 lbs
Weight (Approx) -with Chains	975 lbs	1140 lbs

* iMatch™ is a trademark of Deere & Company

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

400 Series[®]

Single-Spindle Rotary Cutter | **472** | **484**

Clean cut and high performance in heavy mowing applications.

RhinoAg's 400 Series rotary cutters are built for tough jobs. A 4 ½"-diameter cut capacity and deep reinforced domed deck design handle higher volumes of cut material easily. The 210 HP gearbox rating with 5-year limited warranty and durable full-length, full-width deck bracing ensures a long life. The streamlined bracing under the deck maintains material flow through the cutting chamber.

Its durability extends the ¼" x 11" side skirts with ½"-thick material at the impact zone to defend against extra abuse. The cross-braced round pan blade carrier overlaps the gearbox output shaft seal to protect it from cut material, providing excellent durability in heavy mowing applications.

Features & Benefits

- CAT 5 driveline with slip clutch protection
- 7-gauge deck thickness
- ½" x 4" updraft blades
- High blade tip speeds to provide a clean cut in heavy mowing applications

Who Should Buy:

Farms, Ranches, Roadside Maintenance,

Maintaining Overgrowth,

Clearing Areas for
Future Development,

Upkeep of Recreational
Areas



400 Series[®]

Single-Spindle Rotary Cutter | 472 | 484

Standard Equipment & Specifications

	472	484
Cutting Width	72"	84"
Overall Width	79 1/2"	90 1/2"
Overall Length	121"	138 1/2" Lift 154 1/2" Pull
Min Cutting Height	1 1/2"	1 1/2"
Hitch*	CAT I & 2* / CAT 1 & 2 QH	CAT 2 & 3 / Cat 1, 2 & 3 QH
Blade Carrier	Reinforced Pan	Reinforced Pan
Blades	1/2" x 4" Updraft	1/2" x 4" Updraft
Min PTO HP Required	55	60 Lift 50 Pull
Gearbox Rating**	210 HP	210 HP
Gearbox Oil (85W-140)	Factory Filled	Factory Filled
Output Shaft Diameter	2 3/8"	2 3/8"
PTO Type	540 RPM	540 RPM
Blade Tip Speed (FPM)	16,286	15,675
Cutting Capacity (Max.)	4 1/2"	4 1/2"
Driveline Size	CAT 5	CAT 5
Driveline Protection	Slip Clutch	Slip Clutch
Deck Thickness	7 Ga. (3/16")	7 Ga. (3/16")
Side Skirt	1/4" X 11"	1/4" X 11"
Tires & Wheels	Laminated	Laminated, RhinoTrax or Pneumatic
Safety Deflector	Single or Double Chains	Single or Double Chains
Weight (Approx.)	1,560 lbs.	1,823 lbs.

* Requires adaptor bushing sold separately (Top Link)

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

RhinoAg: **Class A** Implements

▶ **0-59** HP Tractors



www.rhinoag.com

1020 S. Sangamon Ave.

Gibson City, IL 60936

217-784-4261

TR 200 Series[®]

Multi-Spindle Rotary Cutter | **TR208** | **TR210**

Innovative new suspension and driveline designs.

The robust TR Series is the latest addition to RhinoAg's already-impressive lineup of multi-spindle cutters. These rugged cutters offer superior cut quality, easier maintenance, and longer life expectancy to give you the years of dependable service you've come to expect from RhinoAg.

Features & Benefits

- Clean, modernized deck design for easy cleaning and maintenance
- CV drivelines on all pull-type units
- CAT 2 & 3 standard and quick hitch compatible
- Slip clutch driveline protection
- EZ cutting boxes
- Adjustable row spacing on pull type units

Who Should Buy:

Farms, Ranches, Orchards



TR 200 Series®

Multi-Spindle Rotary Cutter | TR208

Standard Equipment & Specifications

	TR208	TR210
Cutting Width	96"	120"
Overall Width	103"	127 1/4"
Overall Length	91" (Lift) 138" (Pull)	106 1/2" (Lift) 149 1/2" (Pull)
Cutting Height	1" – 16"	1" – 15"
Height Adjustment	2.5"x8" Cylinder (Pull)	2.5" X 8" Cylinder (Pull)
Jack Stand	Std (Pull)	Std (Pull)
Hitch	CAT 2/ CAT 3 Std., CAT 2/ CAT 3 Q.H., Pull	CAT 2/ CAT 3 Std., CAT 2/ CAT 3 Q.H., Pull
Blade Carrier	Infinity - Steel	Infinity - Steel
Blades	1/2" x 3" Parallel Updraft	1/2" x 3" Parallel Updraft
Blade Overlap	4"	4"
Horsepower Required	45 (Lift) 30 (Pull/Semi)	60 (Lift) 45 (Pull)
Gearbox Rating	Center: 100 HP Outboard: 65 HP	Center: 100 HP Outboard: 130 HP
Gearbox Oil - 85W-140	Factory Filled Lucas Oil	Factory Filled Lucas Oil
Output Shaft Diameter	1 9/16"	
Blade Tip Speed - 540 RPM	14,661 FPM	16,969 FPM
Blade Tip Speed - 1000 RPM	N/A	16,694 FPM (Lift Type Only)
Cutting Capacity	2"	2"
Driveline Size - 540 RPM	Cat 4 (Lift main) Cat 4 (Pull main)	Cat 4 (Lift main) Cat 4 (Pull main)
Driveline Size - 1000 RPM	N/A	Cat 4 (Lift main)
Driveline Protection	Slip Clutch (main, jackshaft)	Slip Clutch (main, jackshaft)
Deck Thickness	12 GA	12 GA
Side Skirt	7 GA	7 GA
Tires and Wheels	Laminate (Lift) Laminate, Rhino Trax (Pull)	Laminate (Lift), Laminate, Rhino Trax (Pull)
Safety Tow Chain	Std (Pull)	Std (Pull)



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

* Gearbox power ratings based on actual field performance

RhinoAg: **Class A** Implements

▶ **0-59** HP Tractors



www.rhinoag.com
1020 S. Sangamon Ave.
Gibson City, IL 60936
217-784-4261

TR 300 Series[®]

Multi-Spindle Rotary Cutter | **TR308** | **TR310**

Innovative new suspension and driveline design.

The TR300 pull types feature a rigid-deck suspension system that creates a more even cut and offers longer part life due to reduced impact load on critical components. As heavier units, the TR308 and TR310 need this independent axle suspension to help reduce the hard, continuous impacts that cutters see out in the field daily.

Features & Benefits

- Clean, modernized deck design for easy cleaning and maintenance
- CV drivelines on all pull-type units
- CAT 2 & 3 hitch compatible
- Slip clutch driveline protection
- Adjustable row spacing on pull type units

Who Should Buy:

Farms, Ranches,
Demanding Agricultural
Maintenance




TR 300 Series[®]

Multi-Spindle Rotary Cutter | **TR308** | **TR310**

Standard Equipment & Specifications

	TR308	TR310
Cutting Width	96"	120"
Overall Width	103"	127 1/4"
Overall Length	94 1/2" (Lift) 97 1/2" (Semi) 143" (Pull)	107 1/4" (Lift) 155" (Pull)
Cutting Height	1" – 15"	1" – 15"
Height Adjustment	Cylinder (Pull/Semi)	Cylinder (Pull)
Jack Stand	Std (Pull)	Std (Pull)
Hitch	CAT 2/ CAT 3 Std., CAT 2/ CAT 3 O.H., Pull	CAT 2 & 3 Pull
Blade Carrier	Infinity - Steel	Infinity - Steel
Blades	1/2" x 4" Parallel Updraft	1/2" x 4" Parallel Updraft
Blade Overlap	4"	4"
Horsepower Required	55 (Lift) 35 (Pull/Semi)	80 (Lift) 55 (Pull)
Gearbox Rating	Center: 100 HP Outboard: 130 HP	Center: 210 HP Outboard: 210 HP
Gearbox Oil - 85W-140	Factory Filled Lucas Oil	Factory Filled Lucas Oil
Output Shaft Diameter	2"	2 3/8"
Blade Tip Speed - 540 RPM	16,512 FPM	16,215 FPM
Blade Tip Speed - 1000 RPM	16,378 FPM	16,238 FPM
Cutting Capacity	3"	3"
Driveline Size	Cat 4 (Lift/Semi main) Cat 5 (Pull main)	Cat 4 (Lift main) Cat 5 (Pull main)
Driveline Protection	Slip Clutch	Slip Clutch
Deck Thickness	10 GA	10 GA
Side Skirt	1/4"	1/4"
Tires and Wheels	Laminate (Lift) Laminate, RhinoTrax (Pull/Semi)	Laminate, RhinoTrax
Safety Tow Chain	Std (Pull)	Std (Pull)

* Gearbox power ratings based on actual field performance

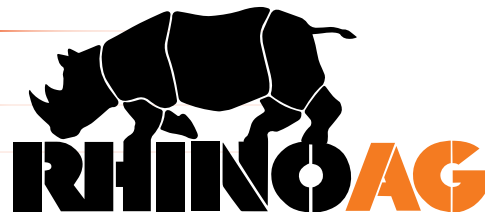

www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

TS10[®]

Flex-Wing Rotary Cutter

Turns out that bigger isn't always better.

Don't let the small size of the TS10 deceive you—it's packing some seriously heavy-duty guts. With a 120" cutting width and ½" x 3" blades, the TS10 is prepared to take on brush up to a full 2" in diameter.

The Flex-Wing deck design lets you cut on rolling terrain without having to make multiple passes—something fixed-deck cutters can only dream of doing. And with a transport width of only 93", the TS10 can get practically anywhere.

Features & Benefits

- Fits through gates as narrow as 8'
- 2" cut capacity
- Replaceable skid shoes
- Heavy-duty turn buckles

Who Should Buy:

Homeowners,
Roadside Maintenance,
Upkeep of Recreational
Areas




TS10[®]

Flex-Wing Rotary Cutter

Standard Equipment & Specifications

	TS10
Cutting Width	120"
Transport Width	93"
Transport Height	68"
Overall Width	126"
Overall Length	162"
Cutting Height*	1"-15"
Height Adjustment	3 1/2" x 8" Hydraulic Cylinder
Hydraulic Hose Ends	Standard
Jack Stand	Standard
Hitch	Pull Type, Parallel Clevis
Blade Carrier	Infinity - Steel
Blades	1/2" x 3" High Lift
Blade Overlap	6"
Tractor PTO HP Range	25 - 60 HP
Gearbox Oil (85W-140)	Factory Filled Lucas Oil
Output Shaft Diameter	1 9/16"
Blade Tip Speed Center 540 RPM	13,028 FPM
Blade Tip Speed Wing 540 RPM	13,680 FPM
Cutting Capacity	2"
Driveline ASABE - Main	Cat 4 CV
Driveline ASABE - Wing	Cat 3 SC
Deck Thickness Center	12 Ga.
Side Skirt	1/4" x 10"
Tires & Wheels (4 or 6)	Laminated, Rhino Trax Foam Filled
Wing Lift	2" x 14" Cylinder
Wing Flex (Degrees)	90° Up/25° Down
Operational Wing Flex	45° Up/ 25° Down
Safety Tow Chain	Standard
Safety Deflectors	Rubber Deflectors or Single Chain Guards
Tongue Weight	720 lbs.
Weight (Approx.)	2,190 lbs.

* Cutting height dependent on tire size
TS10 is NOT intended for Commercial
or Government use

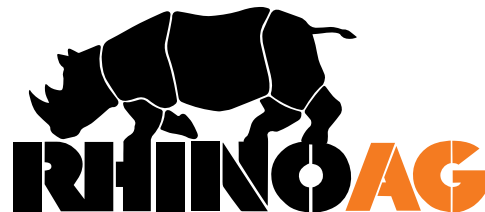

www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

TS12[®] Stealth

Flex-Wing Rotary Cutter

The ideal machine for customers with a smaller tractor who need a Flex-Wing cutter's versatility.

The TS12 Stealth features an exclusive close-coupled design for low tongue weight and a shorter turning radius. This machine's unique "stealth" appearance—comprising of a very short wheel base and anti-scalp features—make this the ideal machine for those who need a Flex-Wing cutter's versatility but may not have a tractor large enough to pull a 15' unit.

Features & Benefits

- 12' cutting width; 1 ½" cutting capacity
- Impressive short turn radius for tight spaces
- Provides a dramatic reduction in mowing time
- Smooth decks for easy cleaning
- High-volume cutting chamber with unobstructed underside for airflow
- Fully-pivoting equal-angle tongue and direct acting suspension system for uneven terrain
- Unique Wing-Bar blade carrier that protects the gearbox output shaft with minimal weight
- Large center skid shoes and tapered wing shoes for anti-scalping protection
- Chain guards included for protection
- Available with 4 or 6 tires

Who Should Buy:

Small Farms, Parks,
Schools, Homesteads



TS12[®] Stealth

Flex-Wing Rotary Cutter

Standard Equipment & Specifications

	TS12 Stealth
Cutting Width	144"
Transport Width	97"
Transport Height	65"
Overall Width	155"
Overall Length	148"
Cutting Height*	2"-12"
Self-Leveling Height Adjustment	3 1/2" x 8" Hydraulic Cylinder
Hydraulic Hose Ends	Standard
Jack Stand	Standard
Hitch	Pull-Swivel
Blade Carrier	Infinity - Steel
Blades	1/2" x 3"
Blade Overlap	6"
HP Required	35 - 60 HP
Gearbox Rating - Power Divider**	160 HP
Gearbox Rating - Center & Wing**	65 HP
Gearbox Oil (85W-140)	Factory Filled
Output Shaft Diameter	1 9/16"
Blade Tip Speed Center 540 RPM	14,504 FPM
Blade Tip Speed Wing 540 RPM	13,925 FPM
Cutting Capacity (Max)	1 1/2" Diameter
Driveline Size - Main	Cat 4 Equal Angle
Driveline Size - Wing	Cat 3
Deck Thickness - Center	10 Ga. Bottom, 12 Ga. Top
Deck Thickness - Wings	Double 12 Ga.
Side Skirt	1/4" x 11 1/2"
Tires & Wheels (4 or 6)	RhinoTrax Foam Filled, or Laminated Tires
Wing Lift Hydraulics	Standard
Wing Flex (Degrees)	88° Up/25° Down
Operational Wing Flex	25° Down, 45° Up
Safety Tow Chain	Standard
LED Light Kit	Standard
Safety Deflectors	Chain Guards
Wheel Base	126 1/4"
Tongue Weight	748 lbs.
Weight (Approx.)	2,750 lbs.

* Cutting height dependent on tire size

** Gearbox ratings based on actual field performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

2150[®]

Flex-Wing Rotary Cutter

A sleek design with the same durability you expect from RhinoAg.

Engineered for outstanding strength and durability, the 2150 Flex-Wing Rotary Cutter provides improved access to the splitter box for ease of maintenance; greater access to service areas; smooth, quiet operation; and an Infinity cast carrier. The improved gearbox design, which includes a more stable driveshaft-to-blade-carrier design, offers more torque with the same horsepower than previous models.

Features & Benefits

- Smooth top and bottom deck design with dual cut chambers
- New composite divider shield
- Mechanical level lift
- Infinity cast carrier
- New improved tongue design features standard clevis
- CAT 5 CV main and CAT 4 wing drivelines
- Coil spring suspension
- LED lights

Who Should Buy:

General Mowing,
Pasture Maintenance,
Roadside & Right-of-Way Mowing,
Farm Use,
Commercial Mowing,
Industrial Mowing



2150[®]

Flex-Wing Rotary Cutter

Standard Equipment & Specifications

	2150
Cutting Width	180"
Transport Width	116"
Transport Height	75"
Overall Width	187"
Overall Length	172"
Cutting Height*	2"-14"
Height Adjustment	2 1/2" x 8" Hydraulic Cylinder
Hydraulic Hose Ends	Standard
Jack Stand	Standard
Hitch	Clevis
Blade Carrier	Infinity
Blades	1/2" x 4" Parallel Lift
Blade Overlap	6"
Horsepower Required	50 HP
Gearbox Rating Divider **	160 HP
Gearbox Rating Center & Wing **	130 HP
Gearbox Oil (85W-140)	Factory Filled
Output Shaft Diameter	2"
Blade Tip Speed Center	
Center 540 RPM	14,861 FPM
Center 1000 RPM	15,570 FPM
Wing 540 RPM	14,861 FPM
Wing 1000 RPM	15,776 FPM
Cutting Capacity	2 1/2"
Driveline Size Main	Cat 5 CV
Driveline Size Wing	Cat 4
Driveline Protection	Slip Clutch
Deck Thickness Center	10 Ga. (Top), 7 Ga. (Bottom)
Deck Thickness Wing	10 Ga. (Top & Bottom)
Side Skirt	1/4" x 12 3/8"
Tire Selections	Rhino Trax, Foam Filled, Laminated, or Pneumatic (4, 6, or 8 Tires)
Wing Lift	Mechanical Level Lift
Wing Flex	25° Down/ 87° Up,
Operational Wing Flex	25° Down/ 45° Up
Weight (Approx.)	4,290 lbs. (w/ Single Chains & 6 Rhino Trax Tires)
Tongue Weight	1,430 lbs.
Safety Tow Chain	Standard
LED Light Kit	Standard
Safety Deflectors	Deflectors, Chains, or Combination

* Cutting height dependent on tire size

** Gearbox power ratings based on actual field performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

3000 Apex Series®

Flex-Wing Rotary Cutter | 3100 | 3150

Versatility and durability at an incredible price. The 3000 or "Apex" Series Flex-Wing cutters use a ½" x 4" blade to make quick work of grass and brush up to 3" in diameter. These smaller cutters only require 50 horsepower from your tractor, so this is the unit for everyone: from full-time ranchers to weekend hobbyists. The Apex Series cutters are designed with slip-clutch protection and hydraulic wing lift.

Features & Benefits

- Smooth domed deck that's easier to clean with a larger cutting chamber
- 10-gauge deck thickness
- Infinity blade carrier for strong, durable stump jumping
- Locking clevis pivot hitch device for easy hookup
- Simple independent suspension for less maintenance
- Standard safety-tow chains
- 4 optional wheel configurations
- Durable LED light kit
- 6-year gearbox warranty

Who Should Buy:

General Mowing, Pasture Maintenance, Shredding Crops and Stalks, Roadside and Right-of-Way Mowing, Commercial Mowing, Farm Use, Heavy-Duty Agriculture Use, Industrial Mowing



3000 Apex Series®

Flex-Wing Rotary Cutter | **3100** | **3150**

Standard Equipment & Specifications

	3100	3150
Cutting Width	126"	180"
Transport Width *	88"	96"
Transport Height *	80"	80"
Overall Width *	133"	187"
Overall Length *	176"	176"
Cutting Height *	2"-14"	2"-14"
Height Adjustment	Hydraulic Cylinder	Hydraulic Cylinder
Hydraulic Hose Ends	Standard	Standard
Jack Stand	Standard	Standard
Hitch	Pull	Pull
Blade Carrier	Infinity	Infinity
Blades	1/2" x 4" Parallel Lift	1/2" x 4" Parallel Lift
Blade Overlap	6"	6"
PTO Horsepower Required	50 HP	50 HP
Gearbox Rating - Divider**	160 HP	160 HP
Gearbox Rating - Center and Wing**	110 HP	130 HP
Gearbox Oil - 85W-140	Factory Filled	Factory Filled
Output Shaft Diameter	2"	2"
Blade Tip Speed - Center 540 RPM	14,861 FPM	14,861 FPM
Blade Tip Speed - Center 1000 RPM	15,570 FPM	15,570 FPM
Blade Tip Speed - Wing 540 RPM	14,861 FPM	14,861 FPM
Blade Tip Speed - Wing 1000 RPM	15,776 FPM	15,776 FPM
Cutting Capacity	3"	3"
Driveline Size - Main	Cat 4 CV	Cat 4 CV
Driveline Size - Wing	Cat 4	Cat 4
Driveline Protection	Slip Clutch	Slip Clutch
Deck Thickness	10 GA	10 GA
Side Skirt	1/4" x 9 5/8"	1/4"
Tires and Wheels	Rhino Trax, Foam Filled, or Laminated	Rhino Trax, Foam Filled, or Laminated
Wing Lift Hydraulics	Standard	Standard
Wing Flex (Degrees)	90° Up/ 25° Down	90° Up/ 25° Down
Operational Wing Flex	45° Up/ 25° Down	45° Up/ 25° Down
Safety Tow Chain	Standard	Standard
LED Light Kit	Standard	Standard
Safety Deflectors	Rubber Deflectors or Chain Guard	Rubber Deflectors or Chain Guard
Tongue Weight	1,610 lbs	1,610 lbs
Weight (Approx)	4,830 lbs	5,190 lbs



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

* Dependent on tire size

** Gearbox power ratings based on actual field performance

Heavy-Duty Rear Blades

Rugged durability, superior craftsmanship, and innovative design. The constant curvature and the perfect fit of the replaceable cutting edge allows RhinoAg blades to cut and roll the material rather than dragging it, saving time, horsepower, and fuel. Multiple manual adjustment settings and infinite hydraulic settings make Rhino blades some of the easiest rear blades to operate.

Features & Benefits

- Tough 1/2" x 6" replaceable cutting edges for long life
- Slightly extended cutting edge to help reduce rate of moldboard wear
- Optional gauge wheels, quick-attach end plates, and skid shoes for maximum versatility

950

- CAT 1 & 2 three-point and quick-hitch compatibility
- 3/8" x 17" moldboard
- 3" diameter solid steel cold-rolled kingpin
- 30" maximum offset
- Manual or hydraulic adjustments

Who Should Buy:

Livestock Lot Cleaning, Ditch Work,
Building/Maintaining Roads, Snow Removal,
Terrace Building/Maintenance



Heavy-Duty Rear Blades

Standard Equipment & Specifications

	950	1540
Moldboard Width	8', 9'	8', 9', & 10'
Moldboard Dimension	3/8" x 17"	1/2" x 18"
Cutting Edge	1/2" x 6"	1/2" x 6"
Support Stand	Std	Std
Hitch	CAT 1 & 2 / CAT 1 & 2 QH	CAT 2 & 3 / CAT 2 & 3 QH
Maximum HP (2WD)	8' - 125 9' - 95	8' - 190 9' - 175 10' - 160
Maximum HP (FWA)	8' - 106 9' - 81	8' - 162 9' - 149 10' - 136
Kingpin Diameter	3" Solid Steel	4" Solid Steel
Adjustment Types	Manual or Hydraulic	Manual or Hydraulic
Offset (Max.)	30"	37"
Pivot Forward	Up to 45°	Up to 45°
Pivot Reverse	Up to 45°	Up to 45°
Tilt- Up & Down	Up to 15°	Up to 15°
Weight (Approx.)	8' - 836 Lbs. 9' - 876 Lbs.	8' - 1,712 Lbs. 9' - 1,796 Lbs. 10' - 1,880 Lbs.
	2500	3500
Moldboard Width	8', 10', 12'	12', 14'
Moldboard Dimension	1/2" x 20"	1/2" x 20"
Cutting Edge	1/2" x 6"	1/2" x 6"
Support Stand	Std	Std
Hitch	CAT 2 & 3 / CAT 2 & 3 QH	CAT 3 & 4 / CAT 3 & 4 QH
Maximum HP (2WD)	8' - 250 10' - 225 12' - 175	N/A
Maximum HP (FWA)	8' - 220 10' - 200 12' - 160	12' - 300 14' - 250
Kingpin Diameter	4.5" Steel Bar	5" Steel Bar
Adjustment Types	Hydraulic	Hydraulic
Offset (Max.)	46"	50"
Pivot Forward	Up to 45°	Up to 45°
Pivot Reverse	Up to 45°	Up to 45°
Tilt- Up & Down	Up to 15°	Up to 15°
Weight (Approx.)	8' - 2,120 Lbs. 10' - 2,260 Lbs. 12' - 2,400 Lbs.	12' - 3,463 Lbs. 14' - 3,603 Lbs.



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261